



Simple CPLD Rev 4 – 3.3V/5V

Supply voltage jumper selectable

JTAG Cable may feed
connector from
opposite site, note
Pin 1 indicator



Shown set for
Internal Clock

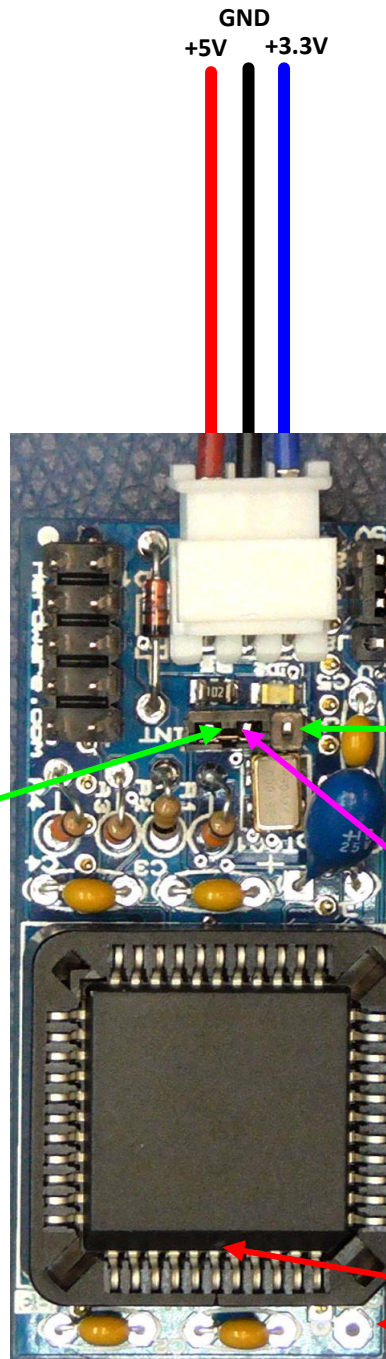

+5V Selection

+3.3V Selection

Ground

Optional: Remove
jumper and apply
external clock to
middle pin.

PIN 1

VCC Pins: 35, 40
GND Pins: 10,20,30

Altera EPM7064SLC44 +5V ONLY
Altera EPM7064AELC44 +3.3V ONLY